




SOCKET CLAMP

MODEL TMSC

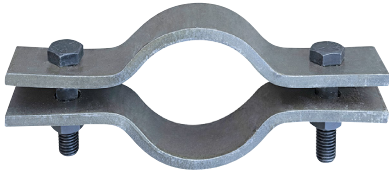

DESCRIPTION:

- **Material:** Carbon steel and stainless steel
- **Sizes:** 3" through 24"
- **Use:** Designed for DI pipe. Used with all-thread rod and Trumbull Tie Lugs or Tie Bolts for joint restraint to prevent separating.

*Socket Clamps are designed for centrifugally-spun cast and ductile iron pipe with OD's. as shown in the table below

NO. 585 WASHERS INCLUDED

- For 3" - 12" Socket Clamps
- Usage for 3/4" rod
- Two washers are required for each Socket Clamp
- Sizes 3" through 12" are supplied with #585 cast washers
Sizes 14" and larger are supplied with two fabricated carbon steel washers

NO. 585 WASHERS

Material	Bore Size
CS	1"
SS	1"

CARBON STEEL SOCKET CLAMP

Size	Bolt Size	Stock Size	Pipe OD
3"	5/8" x 3"	3/8" x 2"	3.96
4"	5/8" x 3"	1/2" x 2"	4.8
6"	5/8" x 3"	1/2" x 2"	6.9
8"	5/8" x 3"	1/2" x 2"	9.05
10"	5/8" x 3"	1/2" x 2"	11.1
12"	5/8" x 3-1/2"	1/2" x 2"	13.2
14"	7/8" x 4"	3/4" x 3"	15.8
16"	1" x 4-1/2"	3/4" x 4"	17.4
18"	1-1/4" x	3/4" x 4"	19.5
20"	1-1/4" x	3/4" x 4.5"	21.6
24"	1-1/2" x 5"	3/4" x 5"	25.8

STAINLESS STEEL SOCKET CLAMPS

Size	Bolt Size	Stock Size	Pipe OD
3"	5/8" x 3"	3/8" x 2"	3.96
4"	5/8" x 3"	1/2" x 2"	4.8
6"	5/8" x 3"	1/2" x 2"	6.9
8"	5/8" x 3"	1/2" x 2"	9.05
10"	5/8" x 3"	1/2" x 2"	11.1
12"	5/8" x 3-1/2"	1/2" x 2"	13.2

PROJECT		APPROVAL STAMP
PROJECT:		<input type="checkbox"/> APPROVED
ADDRESS:		<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:		<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:		REMARKS:
NOTES 1:		
NOTES 2:		