

TRUMBULL

Trumbull Manufacturing

3850 Hendricks Road, Youngstown, Ohio 44515

Phone: 330.270.7888 | Toll Free: 877.504.1507 | Fax: 330.392.0756

www.trumbull-mfg.com

Other Polywrap


Clear Polywrap 12 Mil

Pipe Size	Layflat Width	Perf'd Every	Item No	Roll Length
3" - 8"	20"	20 ft.	388-8605	200 ft.
10" - 14"	30"	20 ft.	388-8610	200 ft.

Sanitary Sewer Polywrap

8 Mil, for 4" cast iron soil pipe, black

Pipe Size	Layflat Width	Perf'd Every	Item No	Roll Length
4"	12"	12 ft.	364-9941	408 ft.

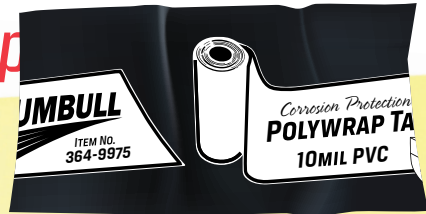

"Don't Forget the Polywrap Tape!"

MULTIPURPOSE PVC TAPE: IAPMO/UPC certified for AWWA and plumbing applications.

Item No	Roll Size	Thickness	Weight
364-9975	2" x 100'	10 mil	1.00 lbs.

GENERAL PURPOSE PE TAPE: blue in color.

Item No	Roll Size	Thickness	Weight
364-9976	2" x 108'	9 mil	1.00 lbs.

Zinc Anode Caps

Sacrificial Zinc Anodes



6 OZ.

2.5 OZ.



Made from Special **HIGH GRADE ZINC**



Reverse Side



Typical Installation

Zinc Anode Caps

Description	2.5 oz.	6 oz.
	Item No	Item No
5/8"-11, N.C.	----	364-1008
3/4"-10, N.C.	----	364-1010
7/8"-9, N.C.	364-1004	spec/ord.
1"-8, N.C.	364-1006	364-1012

Trumbull Zinc Anode Caps are made from Special High Grade Zinc and third-party tested to confirm the maximums allowable in both ASTM B418-88, "Galvanic Zinc Anodes", and Military Specification Mil-18001K.

See reverse side for drawing. Inquire about Anode Caps with different weights or shapes.

Trumbull Anode Caps are designed for fighting corrosion of underground bolts and nuts, and iron pipe and fittings.

These threaded hex head caps, when secured to a bolt or stud, become the sacrificial anode, corroding, while the remaining metal parts are protected. This corrosion protection continues until Zinc is consumed.